



(11) **EP 1 446 029 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
03.01.2007 Bulletin 2007/01

(21) Application number: **02784506.4**

(22) Date of filing: **20.11.2002**

(51) Int Cl.:
A43C 15/16 (2006.01)

(86) International application number:
PCT/US2002/037114

(87) International publication number:
WO 2003/043456 (30.05.2003 Gazette 2003/22)

(54) **ARTICLE OF FOOTWEAR WITH A REPLACABLE GROUND-ENGAGING MEMBER AND METHOD OF ATTACHING THE GROUND-ENGAGING MEMBER**

SCHUHWERK MIT AUSWECHSELBARER STOLLE UND VERFAHREN ZU DEREN BEFESTIGUNG
ARTICLE DE CHAUSSURE AVEC ELEMENT DE PRISE AVEC LE SOL REMPLACABLE ET
PROCEDE DE FIXATION DE CET ELEMENT DE PRISE AVEC LE SOL

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**

(30) Priority: **20.11.2001 US 988737**

(43) Date of publication of application:
18.08.2004 Bulletin 2004/34

(73) Proprietor: **NIKE INTERNATIONAL LTD
Beaverton,
Oregon 97005-6453 (US)**

(72) Inventors:
• **AUGER, Perry
Tigard, OR 97224 (US)**

• **LINDNER, Troy
Portland, OR 97229 (US)**
• **HUDSON, Peter, A.
Portland, OR 97229 (US)**

(74) Representative: **Tombling, Adrian George et al
Withers & Rogers LLP
Goldings House,
2 Hays Lane
London SE1 2HW (GB)**

(56) References cited:
EP-A- 1 068 813 EP-A- 1 250 860
WO-A-99/53790 DE-C- 613 384
US-A- 5 848 482

EP 1 446 029 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to an article of footwear having one or more ground-engaging members, especially an athletic shoe having one or more selectively alterable ground-engaging members (such as spikes, cleats, etc.).

BACKGROUND OF THE INVENTION

[0002] It is generally known to provide one or more protruding ground-engaging members on the sole of a shoe, especially on the sole of an athletic shoe for activities such as golf, soccer, track, baseball, and "American-style" football. Such ground-engaging members are variously known in the art as cleats, spikes, studs, leaves, blades, triangles, nubs, etc., and generally serve to increase traction between the shoe and the ground surface.

[0003] Furthermore, it is conventionally known to use particular types of ground-engaging members for certain types of playing surfaces. For example, molded cleats made from hard rubber or a thermoplastic material are commonly used on hard/firm natural ground surfaces (e.g., hard dirt). Relatively smaller molded rubber nubs are commonly used on artificial turf and the like. Also, relatively thin spikes are conventionally used in golf and in track.

[0004] For activities taking place on soft ground (e.g., wet fields, soggy grass, or muddy ground), it is generally known to use removable ground-engaging members. This is done to enable the user to use differed sized ground-engaging members based on the type of field being played on, and the condition of the field. Conventional removable ground-engaging members are typically engaged with a shoe sole by way of cooperating screw threads or other rotational engagement.

[0005] When conventional removable ground-engaging members are provided with screw threads for engagement with a shoe, a separate tool is used to manually rotate a ground-engaging member to attach and remove the ground-engaging members as desired. This is generally time consuming and labor intensive, and is also problematic if a user decides to change ground-engaging members in a hurried manner, such as during the course of a game, for example.

[0006] Furthermore, conventional removable ground-engaging members must be adequately rotationally tightened so as to ensure good engagement between the shoe and the ground-engaging member. However, it is conventionally difficult to recognize when the ground-engaging member has been adequately tightened. Thus, the ground-engaging member may be inadvertently over-torqued in an attempt to ensure good engagement. This can damage the screw threads on the shoe and/or on the ground-engaging member, making it difficult or even

impossible to subsequently disengage the ground-engaging member from the shoe when desired. On the other hand, the ground-engaging member may be inadvertently under-torqued (for example, to avoid damage caused by over-torquing). When this occurs, the ground-engaging member may not function as a stable traction device and/or may become loose and be susceptible to falling off of the shoe.

[0007] While some conventional ground-engaging members are not threadedly engaged with a shoe, they still suffer from structural and/or functional problems. In particular, some existing non-threaded ground-engaging members are free to rotate relative to the sole. This can be a problem when, for example, the ground-engaging member is axially asymmetrical in shape (for example, conical or frusto-conical) because free edges of an axially asymmetrical ground-engaging member can become exposed, caught on objects and such, and be torn away. Furthermore, relative movement between a ground-engaging member and a sole generally destabilizes the engagement between the ground-engaging member and the sole, compared to holding them fixed relative to one another.

[0008] Also, some existing ground-engaging members use a receiving portion or the like mounted on an exterior surface of the shoe sole. Thus, the receiving portion may possibly be sheared off the sole or may otherwise become dislodged.

BRIEF SUMMARY OF THE INVENTION

[0009] The present invention is generally directed to an article of footwear (such as a shoe, and especially, but not necessarily only, an athletic shoe like a cleated soccer shoe) having a selectively alterable ground-engaging member engaged with a sole of the article of footwear.

[0010] A ground-engaging member according to the present invention is engaged with the sole in a non-rotational manner, such as by simply applying a substantially non-rotational linear force to engage the ground-engaging member with the sole. Such a non-rotational action can be ensured, for example, by providing a rotation preventing mechanism. For example, a rib, spline, ridge, etc. may be provided on one of the ground-engaging member and a corresponding portion of the sole, and a slot, groove, etc. is provided in the other of the ground-engaging member and the corresponding portion of the sole. The rib and slot cooperate in the process of engaging the ground-engaging member with the sole so the ground-engaging member can only be linearly moved into engagement with the sole, with substantially no relative rotation therebetween. Once the ground-engaging member is engaged with the sole, the rotation prevention mechanism additionally prevents subsequent relative rotation between the ground-engaging member and the sole.

[0011] According to one example of the present inven-

tion, one of the sole and the ground-engaging member includes a resilient spring assembly, and the other of the sole and the ground-engaging member includes a leg assembly having legs sized and arranged to resiliently retain the spring assembly therebetween.

An article of footwear falling within the ambits of Article 54(3)EPC is known from document EP-A-1 250 860.

Said article of footwear comprises a non rotational snap-fit engagement between the spring assembly and one leg member.

[0012] When a ground-engaging member according to the present invention is engaged with the sole according to the present invention, it is desirable to provide a detectible feedback to indicate that the ground-engaging member is properly engaged with the sole. In a particular (but not exclusive) example of the present invention, the detectible feedback is an audible feedback (such as, without limitation, a snapping sound or a click sound) that a user can hear when the ground-engaging member is properly engaged with the sole. For example, in the above-described arrangement including spring and leg assemblies, the legs initially resiliently deflect the spring assembly. Subsequently, the spring assembly resiliently recovers, preferably in an audible manner, such as with a snap or click. Therefore, the spring assembly is resiliently retained between the legs of the leg assembly.

[0013] A ground-engaging member according to the present invention may include a selectively removable tip that is engaged with a portion of the sole in accordance with the foregoing description. Furthermore, each portion of the sole may be engageable with several such tips, at least some of which have different heights, such that a given tip may be replaced with another tip having a different height. In this manner, the characteristics (especially, but not necessarily only, ground-engaging characteristics) of the article of footwear may be adjusted quickly and assuredly in accordance with changing playing conditions by avoiding the time-consuming conventional process of using a screw tool to engage and disengage conventional ground-engaging members, while additionally permitting sure engagement of a ground-engaging member because of the detectible feedback provided in accordance with the present invention.

[0014] As mentioned above, the ground-engaging member can be engaged with a sole using a simple, non-rotational pressing force (especially, but not necessarily only, a manual pressing force). Conversely, the ground-engaging member according to the present invention can be disengaged using a simple prying tool. The prying tool may be specially associated with a respective ground-engaging member. However, it may be desirable to be able to use any suitable conventional article as a prying tool, including, for example and without limitation, a screwdriver blade, a coin, and a knife blade.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The present invention will be described in detail

hereinbelow with reference to the attached drawings, in which:

[0016] Figure 1 is a lateral elevational view of a footplate of an article of footwear in accordance with the present invention;

[0017] Figure 2 is a bottom plan view of the footplate illustrated in Figure 1;

[0018] Figure 3a is a perspective view of a tip of a ground-engaging member according to a first embodiment of the present invention;

[0019] Figure 3b is a perspective view of a set of tips of a ground-engaging member according to the first embodiment of the present invention that can be provided together as part of a kit according to the present invention;

[0020] Figure 4a is a perspective view of a tip according to the first embodiment of the present invention engaged with a spring assembly according to the first embodiment of the present invention;

[0021] Figure 4b is a perspective view of a tip according to the first embodiment of the present invention engaged with a spring assembly provided in a raised base portion on the sole according to the first embodiment of the present invention;

[0022] Figure 4c is a perspective view of a prying tool associated with the present invention;

[0023] Figure 5 is a perspective view of a tip of a ground-engaging member according to a second embodiment of the present invention;

[0024] Figure 6 is a perspective view of a spring assembly according to the second embodiment of the present invention;

[0025] Figure 7 is an exploded perspective view of the tip and spring assembly according to the second embodiment of the present invention; and

[0026] Figure 8 is a perspective view of the tip and spring assembly according to the second embodiment of the present invention in engagement with each other.

DETAILED DESCRIPTION OF THE INVENTION

[0027] Figure 1 is a lateral (i.e., from the laterally outer side) elevational view of a footplate 10 of an article of footwear, such as a shoe (particularly, but not necessarily only, an athletic shoe). A right shoe happens to be illustrated by way of example, but this should not be taken as limiting the present invention. In order to assist in the understanding of the subject matter illustrated in the figures, a generic profile of a shoe upper 12 is indicated in phantom in Figure 1.

[0028] For the purposes of the description herein, the article of footwear has a "sole" which includes footplate 10. However, other parts that may be included in a sole, such as a midsole, etc. have been omitted from the drawings for clarity.

[0029] Footplate 10 includes at least one ground-engaging member 14 extending from footplate 10. Commonly, footplate 10 includes a plurality of ground-engaging members 14 distributed over the surface of footplate

10. Figure 2 illustrates one example of how ground-engaging members 14 may be distributed over the surface of footplate 10.

[0030] Generally, the article of footwear can be divided into a forefoot region (generally to the right of line A-A in Figure 2) and a heel or rearfoot region (generally to the left of line A-A in Figure 2). Thus, in some cases (as in the embodiment depicted here), the forefoot region may include a greater number of ground-engaging members 14 than the heel region. However, it is emphasized that the specific number, location, and/or shape of the ground-engaging members 14 that are provided on footplate 10 may vary widely and still be in accordance with the present invention.

[0031] Each ground-engaging member 14 according to the present invention may be a unitary element removably engageable directly with the footplate or sole 10 (see Figure 4a), or may include a raised base portion 26 that is integral with the footplate 10 and a tip 14a (see, also, Figure 4b) selectively engaged with the raised base portion 26 in a manner that will be described in detail hereinbelow. It should be noted that in this arrangement, the tip 14a and the base portion 26 in combination are ground engaging members.

[0032] Each tip 14a according to the present invention can be engaged to footplate 10 and disengaged therefrom as desired or required. Each tip 14a may have a certain, characteristic height or distance that it extends from footplate 10, as will also be discussed later.

[0033] According to the present invention, it is desirable to make tips 14a engage footplate 10 in a "snap-fit" manner. For the purposes of the description herein, a "snap-fit" engagement between two elements should be understood to mean that engagement therebetween depends on the resiliency of at least one of the elements to effect engagement. A first member is initially resiliently or otherwise elastically displaced in the process of being engaged with a second member. Subsequently, the first member resiliently recovers its shape, position, orientation, etc. so as to restrain the second member from moving relative to the first member. The aforementioned resilient recovery may sometimes cause a click or a snapping sound, hence the reference to a "snap" fit.

[0034] Figure 4a illustrates a tip 14a engaged with a spring assembly 16. Spring assembly 16 is associated with a region of footplate 10 with which tip 14a is engaged. Spring assembly 16 may include, for example, a base 18 and a plurality of generally elongate spring members 20 extending from base 18. Spring members 20 are preferably formed to be resiliently flexible along a transverse direction, like leaf springs. Spring members 20 may be made from any material exhibiting sufficient resilience and/or resistance to material fatigue. In one example of the present invention, spring members may be made from molded glass-filled nylon 12 or polyetherimide. When using glass-filled nylon 12 or polyetherimide to make spring members 20, for example, spring members 20 can generally handle a maximum deflection load be-

fore fatigue of about 3,18 kg (7 pounds) each. However, in the arrangement described herein, spring members 20 usually experience deflection loads below 3,18 kg (7 pounds).

[0035] Generally, spring assembly 16 is fixed relative to footplate 10 in a known and suitable manner. For example, at least a portion of spring assembly 16 may be embedded in footplate 10 by, for example, overmolding the material constituting footplate 10. In a particular example, the material constituting footplate 10 may be molded over base 18 of spring assembly 16 while leaving a bore or other opening 23 in the footplate 10 into which spring members 20 extend. Figures 4a and 4b generally illustrate the form of the material of footplate 10 including bore 23 defined therein.

[0036] Generally, tip 14a includes a distal-most (with respect to the article of footwear) head 22, and a leg assembly 24 including a plurality of leg members 24a extending in generally the same direction from head 22. Tip 14a is provided with two spaced apart leg members 24a.

[0037] Head 22 may be either axially symmetrical (e.g., conical, frusto-conical, pyramidal, etc.) or may be uniquely shaped for a given application. See, strictly by way of example, the substantially triangular cross-sectional shape of heads 22 in Figure 2.

[0038] In accordance with the present invention, tip 14a is engaged with footplate 10 by inserting the leg assembly 24 of tip 14a into bore 23. In this regard, it may be desirable to make the exterior surfaces of leg assembly 24 conform closely with interior surfaces of bore 23. This reduces interstitial spaces in which dirt and other debris may lodge. The cooperation between exterior surfaces of leg assembly 24 and interior surfaces of bore 23 should also be sufficiently tolerant so as to facilitate insertion of tip 14a in bore 23 without undue hindrance from contact friction and the like.

[0039] As seen in, for example, Figure 4a, spring members 20 are preferably curved (or bent) and oriented relative to each other so that a spacing between spring members 20 at first increases then decreases in a direction from the proximal ends of spring members 20 to the distal ends thereof. Thus, the spring members 20 together present an intermediate portion having a maximum width X. The spring members 20 are resiliently flexible (particularly in compression) in a transverse direction (i.e., generally orthogonal to the direction of extension of the spring members 20), like leaf springs.

[0040] Respective interior surfaces of leg members 24a may be formed in correspondence with an exterior profile of spring members 20, as seen in Figure 4a. Most generally, however, leg members 24a have a spacing therebetween that is smaller than the maximum width X between spring members 20. For example, as seen in Figure 4a, leg members 24a each include an inwardly protruding distal portion 24b which narrows the spacing therebetween to less than width X.

[0041] Furthermore, it may be desirable to make a

spacing between distal ends of spring members 20 (when spring members 20 are in a neutral, undeflected state) smaller than the distance between protruding portions 24b. Also, protruding distal portions 24b may be generally rounded or tapered in an appropriate manner to help guide the distal ends of the spring members 20 between protruding distal portions 24b. Either or both of these features facilitates receiving the distal ends of spring members 20 between leg members 24a.

[0042] As a result, when tip 14a is pressed into bore 23, the distal portions 24b initially force spring members 20 together. This effect is facilitated because the spring members 20 each taper towards each other (with respect to a direction from the point of maximum width X towards the respective distal ends of spring members 20), providing at least somewhat of a wedging effect between leg members 24a.

[0043] In general, the present invention provides for spring members 20 that are preferably, but not necessarily only, inwardly (i.e., towards one another) resiliently compressed by the respective rigid leg members 24a forced thereagainst. In practice, however, some slight outward deflection of leg members 24a may occur, within the scope of the presently contemplated invention, in reaction to the force applied to spring members 20.

[0044] After the protruding portions 24b pass the portion of spring members 20 having the maximum width X therebetween, the compressive force exerted on spring members 20 decreases because the spacing between the spring members 20 decreases. Therefore, spring members 20 resiliently either fully or partially (i.e., so as to remain under resilient compression) recover their neutral position.

[0045] Preferably, the resilience of spring members 20 is such that the spring members 20 recover their neutral position relatively suddenly, causing an audible snapping or clicking sound. As mentioned above, this provides a positive indication that the tip 14a has become properly (i.e., fully) engaged with spring members 20.

[0046] It is desirable, according to the present invention, to engage tip 14a with spring assembly 16 using a linear, substantially non-rotational motion. It is therefore necessary to provide a rotation prevention mechanism to prevent relative rotation between tip 14a and spring assembly 16. For example, either the tip 14a or the bore 23 can be provided with a rib or spline 32, and the other of the tip 14a and the bore 23 can be provided with a cooperating slot or groove 34. By way of example only, Figure 4 illustrates a rib 32 formed along at least part of the length of leg 24a, and a slot 34 formed along at least part of the length of bore 23, although, as mentioned, the reverse arrangement could be used. Alternatively, if desired, the rib 32 may extend the entire height of the tip 14a as shown in FIG. 3a.

[0047] The cooperation between rib 32 and slot 34 has multiple effects. First, when tip 14a is inserted into bore 23, rib 32 and slot 34 are located, respectively, so as to align the leg assembly 24 with the spring assembly 16 in

the required manner for engagement therebetween. Second, the cooperation of rib 32 and slot 34 prevents relative rotation between tip 14a and spring assembly 16 that might cause damaging torsional forces to be applied to spring members 20 during engagement. Additionally, after tip 14a is properly engaged, the cooperation between rib 32 and slot 34 prevents subsequent rotation of tip 14a, which again could cause damaging torsional forces to be applied to spring members 20 or cause a non-symmetrical head 22 to come out of alignment.

[0048] The tip 14a can be disengaged from footplate 10 by pulling or prying tip 14a, either manually, or using a suitable tool. In particular, a tool can be inserted between an edge of head 22 and the surface of footplate 10. The tool may be specifically adapted for use, or, more preferably, any suitable flat member (including, without limitation, a knife blade, a screwdriver blade, and a coin) can be used. A notch may be provided in head 22 adjacent to the location where head 22 abuts a surface of footplate 10. The notch facilitates insertion of a tool for prying off the tip. See, for example, notch 28 in Figure 4a and notch 28' in Figure 4b, as well as notch 380 in Figure 8, described further below.

[0049] Figure 4c illustrates an example of a tool 36 adapted for prying off a tip 14a. Tool 36 includes a manually-graspable handle 38 (which can be of any suitable shape) having at least one prying tab 40 extending perpendicularly therefrom. In Figure 4c, two prying tabs 40 are provided for use with a tip 14a having two notches (like notch 28(28') in Figures 4a and 4b) provided on opposite sides of head 22 (although a second notch is not shown in Figures 4a and 4b). A lever force is then applied to handle 38 in a direction opposite to the direction in which prying tabs 40 extend to pry tip 14a out of engagement. However, as mentioned above, it is contemplated that a tool (such as a coin or screwdriver blade, for example) could be inserted on only one side of the tip 14a.

[0050] It should be clearly understood from the foregoing that the present invention contemplates and is equally operable by providing a spring assembly on the tip and a leg assembly in association with the footplate, in reverse of the arrangement shown in Figure 4a.

[0051] In use, dirt and debris may become lodged or caked in bore 23 in general, and between spring members 20 in particular. Spring members 20 may therefore be prevented from deflecting as required. It is therefore useful, but not necessary, to provide a substantially rigid central rib or other protrusion 30 extending from head 22 between leg members 24a. Central rib 30 preferably extends between distal ends of spring members 20 when tip 14a is engaged as described above. With this arrangement, central rib 30 can protrude into the space between spring members 20 into order to break up or otherwise dislodge any material (dried mud, for example) deposited therebetween.

[0052] Additionally, the central rib 30 controls the deflection of the spring members 20 during the engagement of the stud 14 into the spring assembly 16. During the

insertion process, the inwardly extending distal portions 24b engage the outside of respective spring members 20 to deflect the spring members 20 inwardly toward each other about their respective base 20a. During this process, the central rib 30 extends downward between the spring members 20 and limits the inward bending of the spring members 20 about their bases 20a as the tips 20b of the spring members 20 are restrained from moving any farther inward toward the other spring member 20 in the X-direction. This restraint by the central rib 30 causes the location of the bending in the spring members 20 to change. Specifically, this restraint causes the bending location to shift up from base 20a towards the angled middle section 20c, as the tips 20b of the spring members 20 move upward along the sides of the central rib 30 just before total engagement. This limiting of the bending of the spring members 20 at their base 20a is a safety and control factor as it lowers the possibility of fatigue of the spring members 20 at their base 20a, and provides a better control of the location of the bending forces.

[0053] Figure 4a illustrates tip 14a as being engaged at a surface of footplate 10. However, as seen in Figures 1 and 4b, for example, footplate 10 may be provided with a plurality of raised base portions 26. In this case, each raised base portion 26 has a spring assembly 16 provided therein in accordance with the foregoing description. Using a plurality of base portions 26 in this manner permits the rest of footplate 10 to remain relative thin, and importantly, flexible. Alternatively, when raised base portions 10 are not provided, the entire sole (including footplate 10) should be made comparatively thicker overall in order to accommodate the spring assemblies 16 therein. In a preferred example according to the present invention, raised base portions 26 are unitarily formed with footplate 10, for example, during the process of forming footplate 10.

[0054] With the exception of raised base portion 26 illustrated in Figure 4b, all other aspects of Figure 4b are identical to the arrangement shown in Figure 4a, so a repeated detailed description thereof is omitted here.

[0055] Each tip 14a is not only generally replaceable, but one tip 14a can be replaced with another tip having a different height Y (see, for example, Figure 4a) (i.e., a distance that tip 14a extends from footplate 10 or from raised portion 26 formed on footplate 10). Thus, the ground engaging characteristics of the article of footwear can be also altered by providing a given arrangement of tips 14a of varying (or identical) heights. One can therefore provide a kit including the article of footwear and one or more sets of tips, each set having, for example, different heights. Also, a prying tool (such as tool 36 illustrated in Figure 4c) may be provided as part of such a kit. As a result, the ground-engaging characteristics of the article of footwear can be selectively altered by selectively replacing tips 14a provided thereon. All of the tips 14a in a set may have the identical height, or at least some may have different heights from each other. Figure 3b illustrates a set 42 of tips 14a', 14a'', and 14a''', each having

the same general structure (as described elsewhere herein) but having differing head heights Y', Y'', and Y'''. Each of the tips may additionally or alternatively have other differences therebetween, particularly a characteristic relevant to traction performance. For example, the respective tips may have differently shaped head portions.

[0056] Figures 5-8 illustrate a tip 140a and a spring assembly 160 according to a second embodiment of the present invention. Tip 140a is similar to tip 14a as described above, in at least some respects. One difference is that the tip 140a includes a rib or ridge 320 that is relatively thicker than rib 32 of the first embodiment, and extends substantially the entire length of leg 240a. In part, rib 320 may serve to further rigidify leg 240a, thereby increasing the ability of leg 240a to deflect a corresponding spring member (as discussed above). The remaining features of tip 140a are similar to those discussed with reference to tip 14a.

[0057] Figure 6 illustrates a spring assembly 160 according to the second embodiment of the present invention. Similar to spring assembly 16 of the first embodiment, spring assembly 160 includes a base 180, from which a plurality of spring members 200 extend. In Figure 6, two spring members 200 are provided. However, different numbers and arrangements of spring members may be used. Spring members 200 are, for example, arranged in a manner similar to spring members 20 of the first embodiment.

[0058] Spring assembly 160 notably includes a wall or frame 360 extending from at least part of the periphery of base 180 in substantially the same direction as spring members 200. The wall 360 may, for example, define a non-cylindrical space therein (as illustrated in Figure 6). This further retards any tendency for tip 140a to rotate relative to spring assembly 160.

[0059] Wall 360 also preferably defines a slot or groove 340 therein for cooperating with rib 320. The cooperation between rib 320 and slot 340 has the benefits similar to those described above relative to the first embodiment of the present invention.

[0060] The presence of wall 360 may also beneficially serve to protect spring members 200 in an overmolding process (of a type discussed above) and/or provide an increased surface area for bonding with a molding material used to form the footplate.

[0061] Other aspects and functionalities of the first embodiment of the present invention discussed above, such as, without limitation, the manner in which legs 240a engage spring members 200, the provision of raised base portions on the footplate, the use of a plurality of tips 140a having varying heights, the use of a central rib 300, and the contemplation of a kit for permitting selective alteration of tips 140a, are applicable to the second embodiment in the same manner as discussed above.

[0062] Figure 7 illustrates tip 140a aligned with spring assembly 160 prior to engagement, by aligning rib 320 with slot 340. Figure 8 is a perspective view illustrating

tip 140a in engagement with spring assembly 160. As mentioned above, a notch or the like 380 may be provided at an edge of head 220 to facilitate insertion of a disengaging tool and to provide a prying surface. The notch (es) 380 (and 28, discussed above) may have any suitable profile that admits a prying tool (as discussed above) so that the tip 140a can be pried off as desired.

[0063] Thus, while there have been shown and described features of the present invention as applied to preferred embodiments thereof, it will be understood that various omissions and substitutions and changes in the form and details of the devices illustrated, and in their operation, and in the method illustrated and described, may be made by those skilled in the art without departing from the scope of the invention as defined in the appended claims.

Claims

1. An article of footwear including an upper (12) and a sole (10), the sole (10) comprising:

a receiving portion including a resilient spring assembly (16); and
 a ground-engaging member (14) having a removable tip (14a) including a pair of spaced apart leg members (24a) depending therefrom, the leg members (24a) configured to resiliently deflect the spring assembly (16) based on a linear motion of the leg members (24a) causing engagement of the spring assembly (16) with the leg members (24a) and the spring assembly (16) configured to resiliently recover after the resilient displacement so as to provide a snap-fit engagement, wherein there is no rotation between the ground-engaging member (14) and the sole (10).

2. The article according to claim 1, wherein the spring assembly (16) includes a first spring member (20) and a second spring member (20) each being curved and oriented with respect to each other such that, in a direction from a proximal end of the first and second spring members (20), respectively, to a distal end of the first spring member (20) and second spring members (20), respectively, a spacing between the first and second spring members (20) initially increases and then subsequently decreases.
3. The article according to claim 1, wherein said sole (10) includes a footplate from which said ground-engaging member (14) extends.
4. The article according to claim 3, wherein said footplate (10) is made from plastic.
5. The article according to claim 1, wherein said sole

(10) includes a plurality of said receiving portions and a corresponding plurality of ground-engaging members (14).

- 5 6. The article according to claim 5, wherein said sole (10) includes a forefoot region (11) and a heel region (13), said forefoot region (11) including a greater number of said ground-engaging members (14) than said heel region (13).

- 10 7. The article according to claim 1, wherein the spring assembly (16) includes first and second spring members (20), said first and second spring members (20) each define an obtuse angle and being oriented with respect to each other such that, in a direction from a proximal end of said first and second spring members (20), respectively, to a distal end of said first and second spring members (20), respectively, a spacing between said first and second spring members (20) initially increased and then subsequently decreases.

- 20 8. The article according to claim 2 or claim 7, wherein said receiving portion includes a raised base having a bore (23) formed therein through which said spring assembly (16) extends, said removable tip (14a) configured for snap-fit engagement with said raised base.

- 30 9. The article according to claim 8, wherein said tip (14a) includes a head (22) and said pair of spaced apart leg members (24a) both extending in generally the same direction from said head (22), wherein said spring assembly (16) is arranged between said pair of leg members (24a), each said leg member (24a) being shaped in substantial conformance with a shape of a respective said spring member (20) of said spring assembly (16) so as to provide a snap-fit engagement between said pair of leg members (24a) and said spring assembly (16).

- 40 10. The article according to claim 9, wherein at least one said leg members (24a) has a rib (32) formed on an exterior surface thereof, and an interior wall of said bore (23) has a slot (34) formed therein corresponding to said rib (32), said rib (32) being positioned on said at least one leg member (24a) and said slot (34) being formed in said interior wall of said bore (23), respectively, so as to align said leg members (24a) and said spring assembly (16) for said snap-fit engagement therebetween.

- 50 11. The article according to claim 10, wherein said tip (14a) further includes a medial rib (32) extending from said head (22) between said leg members (24a).

12. The article according to claim 11, wherein said me-

dial rib (32) extends between respective distal ends of said pair of spring members (20).

13. The article according to claim 1, comprising a plurality of said removable tips (14a), said plurality of tips (14a) being interchangeably snap-fit engageable with said receiving portion. 5
14. The article according to claim 8, wherein said sole (10) includes a plurality of said receiving portions each including a respective raised base, each said raised base extending substantially the same distance from said sole (10). 10
15. The article according to claim 8, wherein said sole (10) includes a plurality of said receiving portions each including a respective raised base, each said raised base having a respective said tip (14a) in snap-fit engagement therewith, at least two of said tips (14a) extending different respective distances from their said respective bases. 15
16. The article according to claim 8, wherein said sole (10) includes a plurality of said receiving portions each including a raised base, each said raised base having a respective said tip (14a) in snap-fit engagement therewith, wherein each of said tips (14a) extends substantially the same distance from said respective bases. 20
17. The article according to claim 1, wherein said spring assembly (16) comprises glass-filled nylon 12 or polyetherimide. 25

Patentansprüche

1. Fußbekleidungsgegenstand mit einem Oberteil (12) und einer Sohle (10), welche Sohle (10) einen Aufnahmeteil, der eine elastische Federanordnung (16) einschließt, und ein den Boden erfassendes Element (14) mit einer abnehmbaren Spitze (14a) umfasst, die zwei beabstandete Schenkelemente (24a) aufweist, die daran hängen, welche Schenkelemente (24a) so gestaltet sind, dass sie die Federanordnung (16) auf der Grundlage einer Linearbewegung der Schenkelemente (24a) elastisch verformen, was zu einer Ineingriffnahme der Federanordnung (16) mit den Schenkelementen (24a) führt, und welche Federanordnung (16) so gestaltet ist, dass sie nach der elastischen Verformung elastisch wieder in ihren ursprünglichen Zustand zurückkehrt, um für eine Rastineingriffnahme zu sorgen, wobei es keine Drehung zwischen dem den Boden erfassenden Element (14) und der Sohle (10) gibt. 30
2. Gegenstand nach Anspruch 1, bei dem die Feder-

anordnung (16) ein erstes Federelement (20) und ein zweites Federelement (20) enthält, von denen jedes gekrümmt und zueinander so ausgerichtet ist, dass in einer Richtung vom proximalen Ende des ersten und des zweiten Federelementes (20) jeweils zum distalen Ende des ersten Federelementes (20) und des zweiten Federelementes (20) jeweils der Abstand zwischen dem ersten und dem zweiten Federelement (20) am Anfang zunimmt und dann anschließend abnimmt. 35

3. Gegenstand nach Anspruch 1, bei dem die Sohle (10) eine Fußplatte einschließt, von der das den Boden erfassende Element (14) ausgeht. 40
4. Gegenstand nach Anspruch 3, bei dem die Fußplatte (10) aus einem Kunststoff besteht. 45
5. Gegenstand nach Anspruch 1, bei dem die Sohle (10) eine Vielzahl von Aufnahmeteilen und eine entsprechende Vielzahl von den Boden erfassenden Elementen (14) einschließt. 50
6. Gegenstand nach Anspruch 5, bei dem die Sohle (10) einen Vorderfußbereich (11) und einen Fersenbereich (13) einschließt, welcher Vorderfußbereich (11) eine größere Anzahl von den Boden erfassenden Elementen (14) als der Fersenbereich (13) einschließt. 55
7. Gegenstand nach Anspruch 1, bei dem die Federanordnung (16) ein erstes und ein zweites Federelement (20) einschließt, wobei das erste und das zweite Federelement (20) jeweils einen stumpfen Winkel bilden und zueinander so ausgerichtet sind, dass in einer Richtung vom proximalen Ende des ersten und des zweiten Federelementes (20) jeweils zum distalen Ende des ersten und des zweiten Federelementes (20) jeweils der Abstand zwischen dem ersten und dem zweiten Federelement (20) am Anfang zunimmt und dann anschließend abnimmt. 60
8. Gegenstand nach Anspruch 2 oder Anspruch 7, bei dem der Aufnahmeteil eine erhöhte Basis mit einer darin ausgebildeten Bohrung (23) enthält, durch die die Federanordnung (16) verläuft, wobei die abnehmbare Spitze (14a) so gestaltet ist, dass sie mit der erhöhten Basis in Rastineingriffnahme kommt. 65
9. Gegenstand nach Anspruch 8, bei dem die Spitze (14a) einen Kopf (22) aufweist und die beiden beabstandeten Schenkelemente (24a) jeweils im Wesentlichen in dieselbe Richtung vom Kopf (22) aus verlaufen, wobei die Federanordnung (16) zwischen den beiden Schenkelementen (24a) angeordnet ist, und jedes Schenkelement (24a) im Wesentlichen konform mit der Form eines jeweiligen Federelementes (20) der Federanordnung (16) geformt ist, 70

um für eine Rastineingriffnahme zwischen den beiden Schenkelementen (24a) und der Federanordnung (16) zu sorgen.

10. Gegenstand nach Anspruch 9, bei dem wenigstens ein Schenkelement (24a) einen Steg (32) aufweist, der an einer Außenfläche ausgebildet ist, und eine Innenwand der Bohrung (23) einen Schlitz (34) aufweist, der darin dem Steg (32) entsprechend ausgebildet ist, welcher Steg (32) an dem besagten wenigstens einen Schenkelement (24a) angeordnet ist, und der Schlitz (34) in der Innenwand der Bohrung (23) so ausgebildet ist, dass er in einer Linie zum Schenkelement (24a) und der Federanordnung (16) ausgerichtet ist, um dazwischen für eine Rastineingriffnahme zu sorgen.
11. Gegenstand nach Anspruch 10, bei dem die Spitze (14a) weiterhin einen mittleren Steg (32) aufweist, der vom Kopf (22) zwischen den Schenkelementen (24a) ausgeht.
12. Gegenstand nach Anspruch 11, bei dem der mittlere Schenkel (32) zwischen den jeweiligen distalen Enden der beiden Federelemente (20) verläuft.
13. Gegenstand nach Anspruch 1, welcher mehrere abnehmbare Spitzen (14a) umfasst, welche Spitzen (14a) austauschbar mit dem Aufnahmeteil verrastet sind.
14. Gegenstand nach Anspruch 8, bei dem die Sohle (10) eine Vielzahl von Aufnahmeteilen einschließt, von denen jeder eine jeweilige erhöhte Basis aufweist, wobei jede erhöhte Basis im Wesentlichen über dieselbe Strecken von der Sohle (10) aus verläuft.
15. Gegenstand nach Anspruch 8, bei dem die Sohle (10) eine Vielzahl von Aufnahmeteilen einschließt, von denen jeder eine jeweilige erhöhte Basis aufweist, wobei jede erhöhte Basis eine jeweilige Spitze (14a) in Rastineingriffnahme damit aufweist und wenigstens zwei der Spitzen (14a) über jeweils verschiedene Strecken von ihren jeweiligen Basen aus verlaufen.
16. Gegenstand nach Anspruch 8, bei dem die Sohle (10) eine Vielzahl von Aufnahmeteilen einschließt, von denen jeder eine erhöhte Basis einschließt, wobei jede erhöhte Basis eine jeweilige Spitze (14a) in Rastineingriffnahme damit aufweist und jede Spitze (14a) im Wesentlichen über die gleiche Strecke von der jeweiligen Basis aus verläuft.
17. Gegenstand nach Anspruch 1, bei dem die Federanordnung (16) glasgefülltes Nylon (12) oder Polyetherimid umfasst.

Revendications

1. Article de chaussure comprenant une empeigne (12) et une semelle (10), la semelle (10) comprenant :
- une partie de réception incluant un ensemble à ressort élastique (16), et
 - un élément d'engagement au sol (14) comportant un bout amovible (14a) incluant une paire d'éléments de pied espacés (24a) partant de celui-ci, les éléments de pied (24a) étant configurés pour dévier élastiquement l'ensemble à ressort (16) sur la base d'un mouvement linéaire des éléments de pied (24a) produisant l'engagement de l'ensemble à ressort (16) dans ces éléments de pied (24a), et l'ensemble à ressort (16) étant configuré pour reprendre élastiquement sa forme après la déviation élastique, de manière à produire un engagement d'enclenchement dans lequel il n'y a aucune rotation entre l'élément d'engagement au sol (14) et la semelle (10).
2. Article selon la revendication 1, dans lequel l'ensemble à ressort (16) comprend un premier élément de ressort (20) et un second élément de ressort (20), courbés chacun et orientés l'un par rapport à l'autre de façon que, dans une direction partant respectivement de l'extrémité proximale des premier et second éléments de ressort (20) pour aller respectivement vers l'extrémité distale de ces premier et second éléments de ressort (20), l'espacement entre les premier et second éléments de ressort (20) augmente initialement puis diminue postérieurement.
3. Article selon la revendication 1, dans lequel la semelle (10) comprend une plate-forme d'où partent les éléments d'engagement au sol (14).
4. Article selon la revendication 3, dans lequel la plate-forme (10) est réalisée en matière plastique.
5. Article selon la revendication 1, dans lequel la semelle (10) comprend une pluralité de parties de réception et une pluralité correspondante d'éléments d'engagement au sol (14).
6. Article selon la revendication 5, dans lequel la semelle (10) comprend une zone d'avant de pied (11) et une zone de talon (13), la zone d'avant de pied (11) comportant un plus grand nombre d'éléments d'engagement au sol (14) que la zone de talon (13).

7. Article selon la revendication 1,
dans lequel
l'ensemble à ressort (16) comprend un premier et
un second éléments de ressort (20), les premier et
second éléments de ressort (20) définissant chacun
un angle obtus et se trouvant orientés l'un par rapport
à l'autre de façon que, dans une direction partant
respectivement de l'extrémité proximale des premier
et second éléments de ressort (20) pour aller res-
pectivement vers l'extrémité distale de ces premier
et second éléments de ressort (20), l'espacement
entre les premier et second éléments de ressort (20)
augmente initialement puis diminue ensuite.
8. Article selon l'une quelconque des revendications 2
ou 7,
dans lequel
la partie de réception comprend une base en saillie
dans laquelle est formé un alésage (23) à travers
lequel s'étend l'ensemble à ressort (16), le bout amo-
vable (14a) étant configuré pour s'engager et s'en-
clencher sur la base en saillie.
9. Article selon la revendication 8,
dans lequel
le bout (14a) comprend une tête (22) et la paire d'élé-
ments de pied espacés (24a) s'étendent tous deux
dans la même direction générale à partir de la tête
(22), l'ensemble à ressort (16) étant disposé entre
la paire d'éléments de pied (24a), chacun de ces
éléments de pied (24a) étant formé essentiellement
en conformité avec la forme d'un élément de ressort
respectif (20) de l'ensemble à ressort (16), de ma-
nière à fournir un engagement d'enclenchement entre
la paire d'éléments de pied (24a) et l'ensemble
à ressort (16).
10. Article selon la revendication 9,
dans lequel
l'un au moins des éléments de pied (24a) comporte
une nervure (32) formée sur sa surface extérieure,
et une paroi intérieure de l'alésage (23) comporte
une fente (34) formée dans celle-ci pour correspon-
dre à la nervure (32), cette nervure (32) étant posi-
tionnée sur l'élément de pied au moins unique (24a)
et la fente (34) étant formée respectivement dans la
paroi intérieure de l'alésage (23), de manière à ali-
gner les éléments de pied (24a) et l'ensemble à res-
sort (16) pour obtenir l'engagement d'enclenche-
ment entre eux.
11. Article selon la revendication 10,
dans lequel
le bout (14a) comprend en outre une nervure mé-
diale (32) partant de la tête (22) et s'étendant entre
les éléments de pied (24a).
12. Article selon la revendication 11,
dans lequel
la nervure médiale (32) s'étend entre les extrémités
distales respectives de la paire d'éléments de ressort
(20).
13. Article selon la revendication 1,
comprenant
une pluralité des bouts amovibles (14a), les bouts
(14a) de cette pluralité pouvant s'engager et s'en-
clencher de manière interchangeable avec la partie
de réception.
14. Article selon la revendication 8,
dans lequel
la semelle (10) comprend une pluralité des parties
de réception comprenant chacune une base en
saillie respective, chaque base en saillie s'étendant
essentiellement sur la même distance à partir de la
semelle (10).
15. Article selon la revendication 8,
dans lequel
la semelle (10) comprend une pluralité des parties
de réception comprenant chacune une base en
saillie respective, chaque base en saillie comportant
un bout respectif (14a) s'enclenchant avec celle-ci,
au moins deux des bouts (14a) s'étendant sur des
distances respectives différentes à partir de leurs
bases respectives.
16. Article selon la revendication 8,
dans lequel
la semelle (10) comprend une pluralité des parties
de réception comprenant chacune une base en
saillie, chaque base en saillie comportant un bout
respectif (14a) s'enclenchant avec celle-ci, chacun
des bouts (14a) s'étendant essentiellement sur la
même distance à partir des bases respectives.
17. Article selon la revendication 1,
dans lequel
l'ensemble à ressort (16) comprend du nylon chargé
de verre (12) ou du polyétherimide.

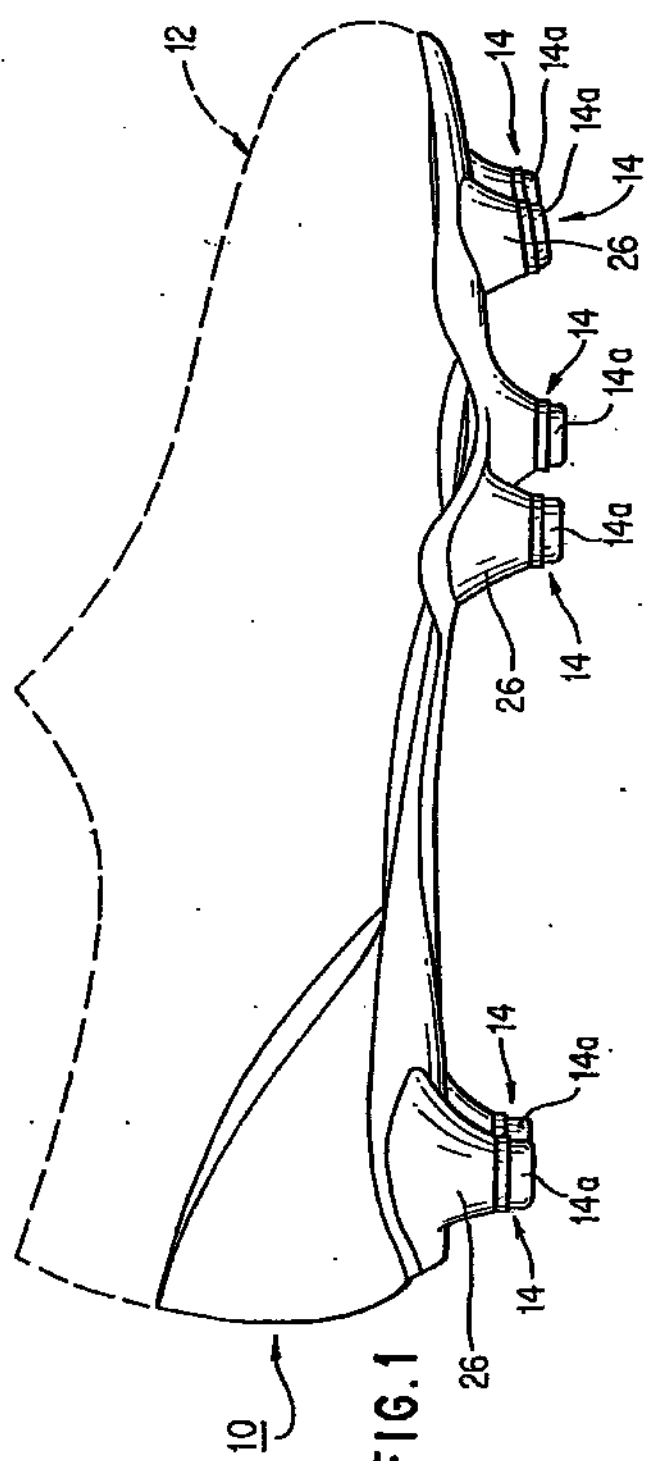


FIG. 1

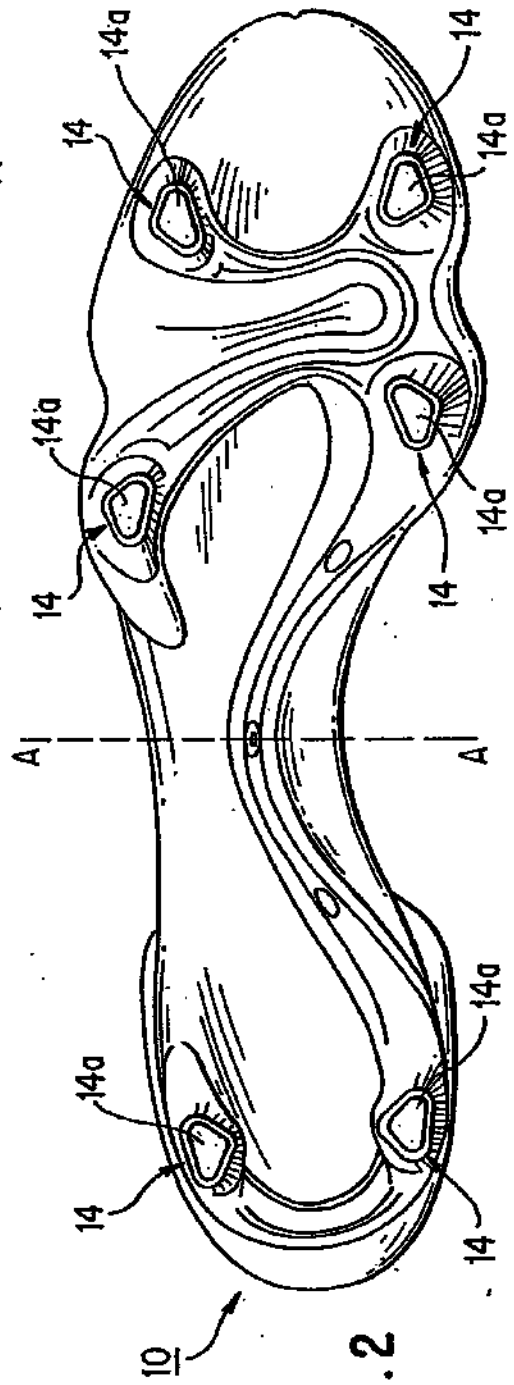


FIG. 2

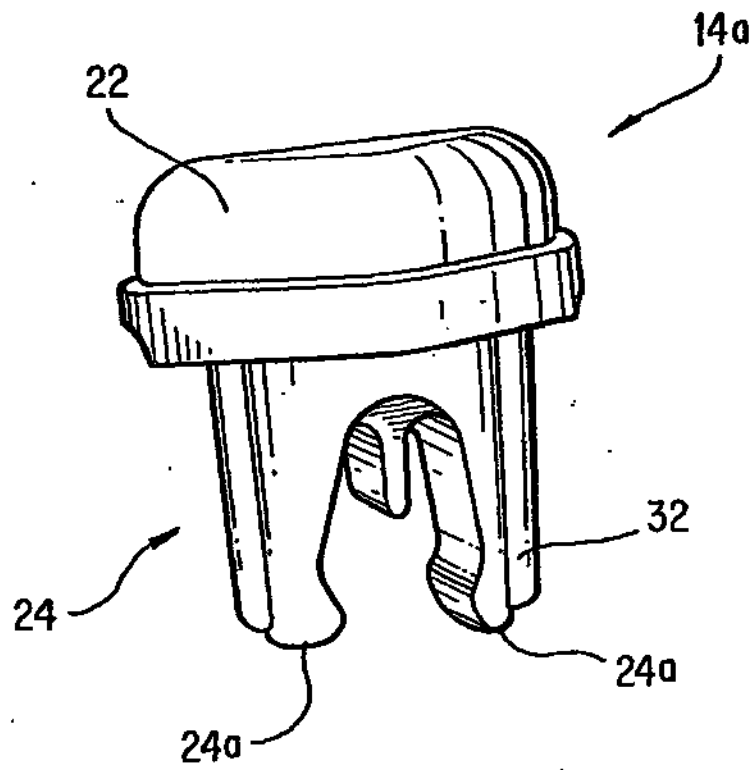


FIG. 3a

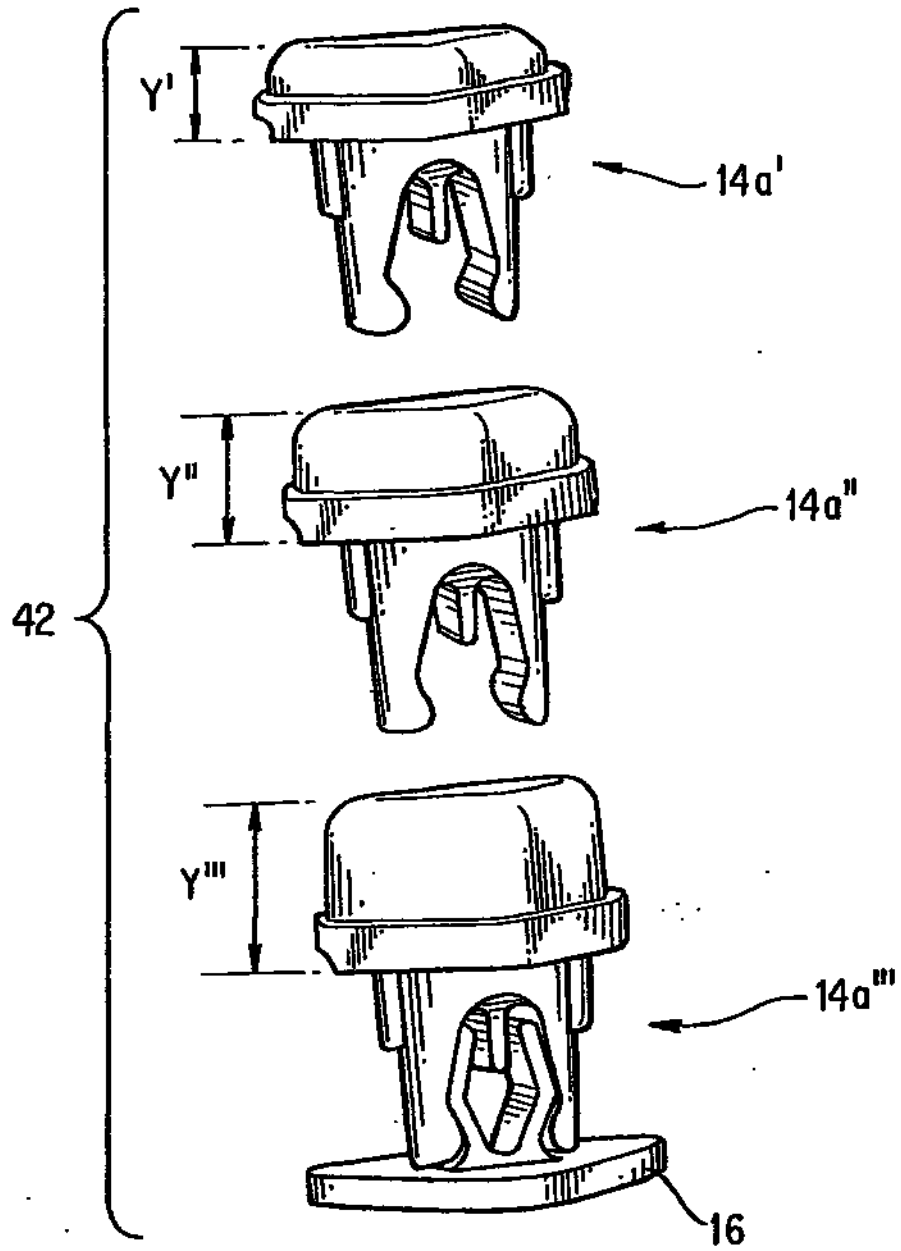


FIG. 3b

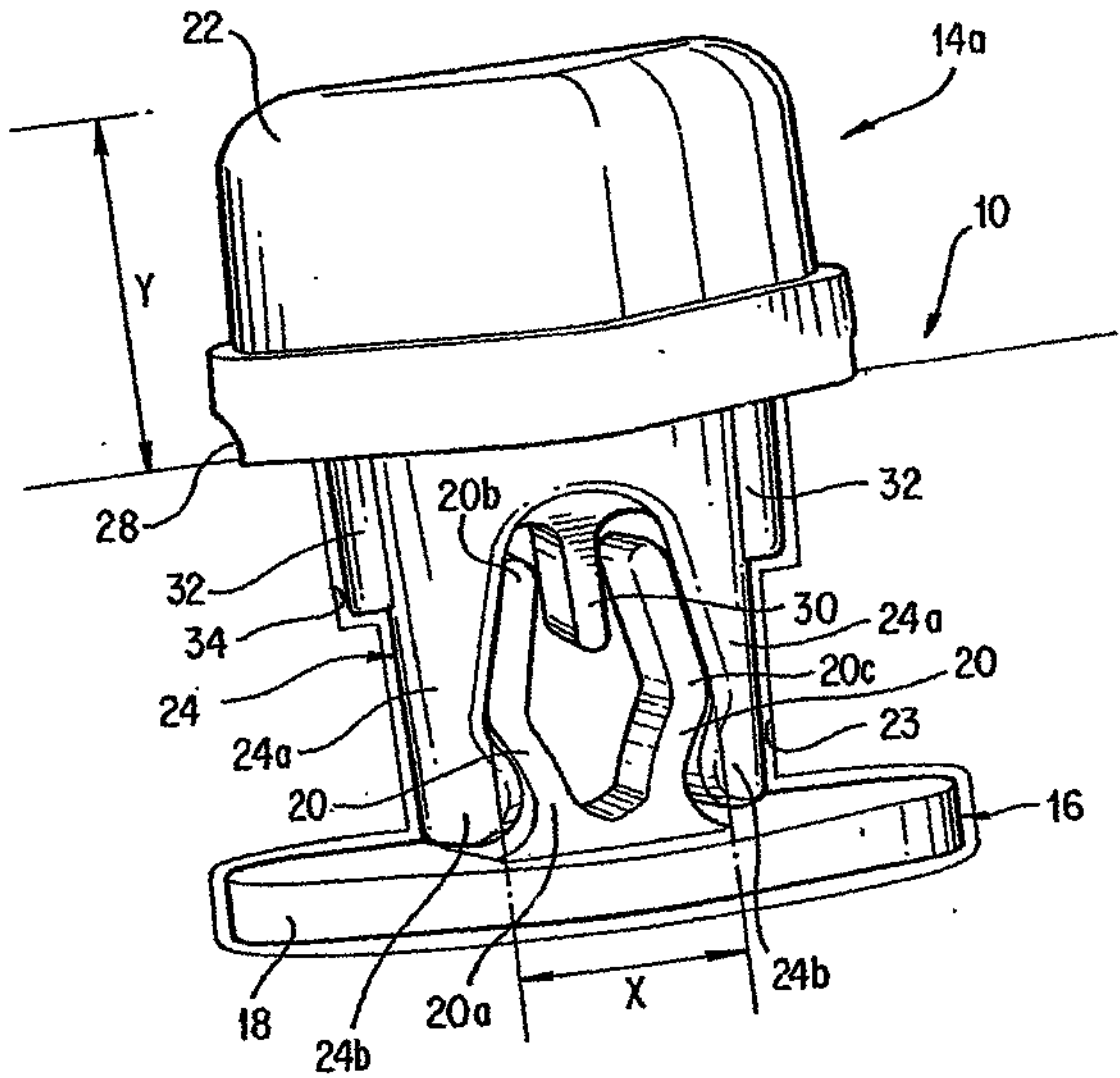


FIG. 4a

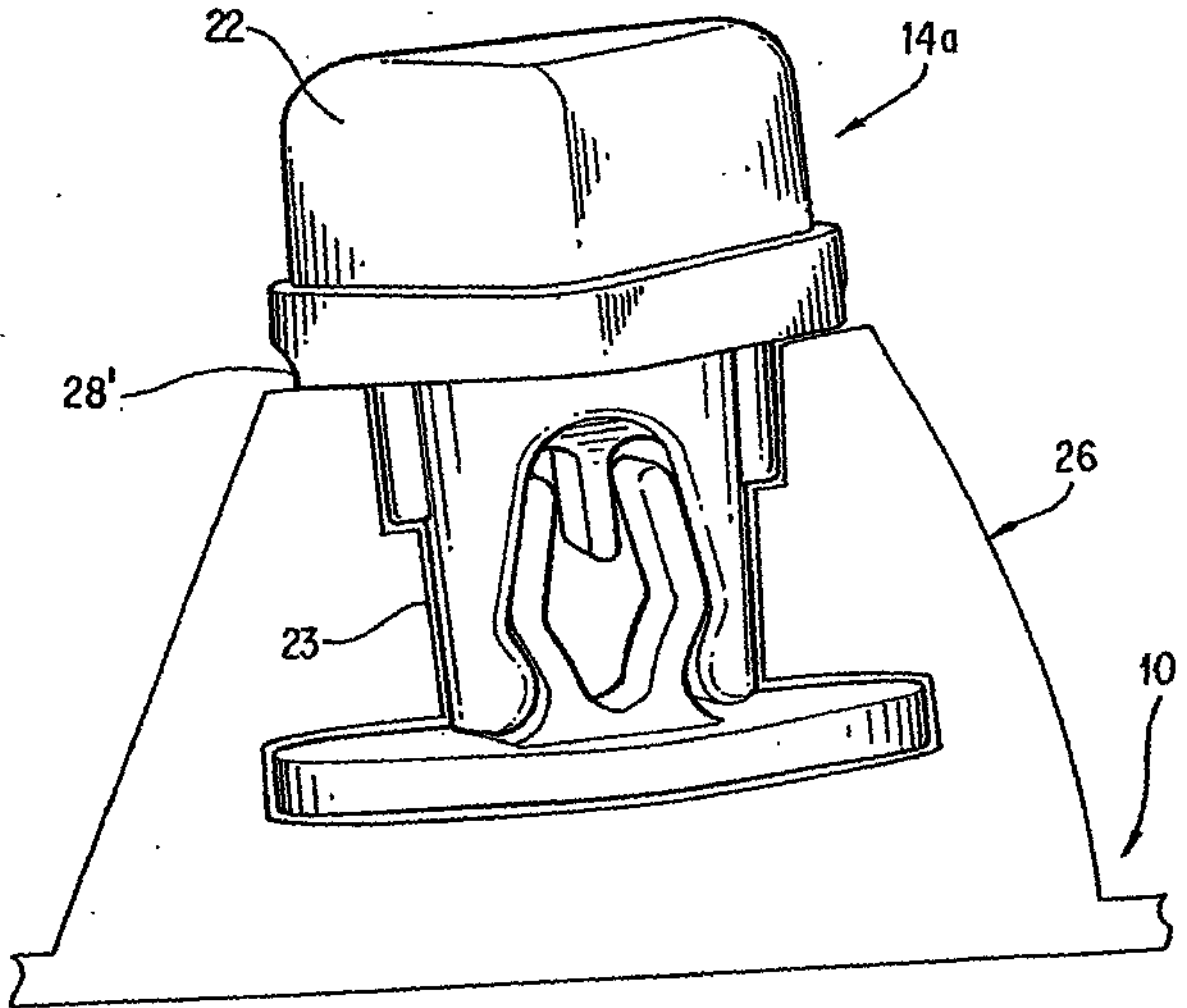


FIG. 4b

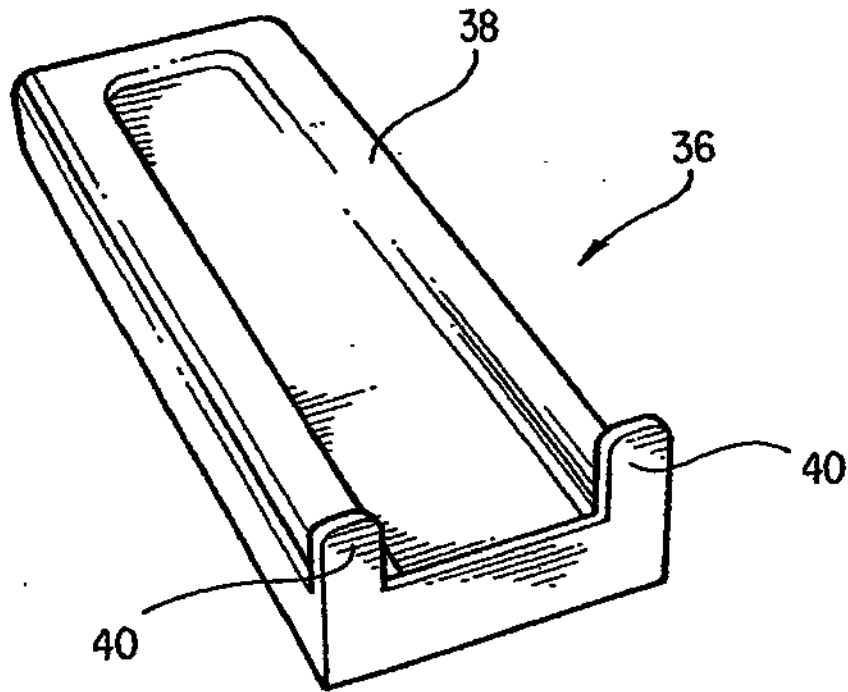


FIG. 4c

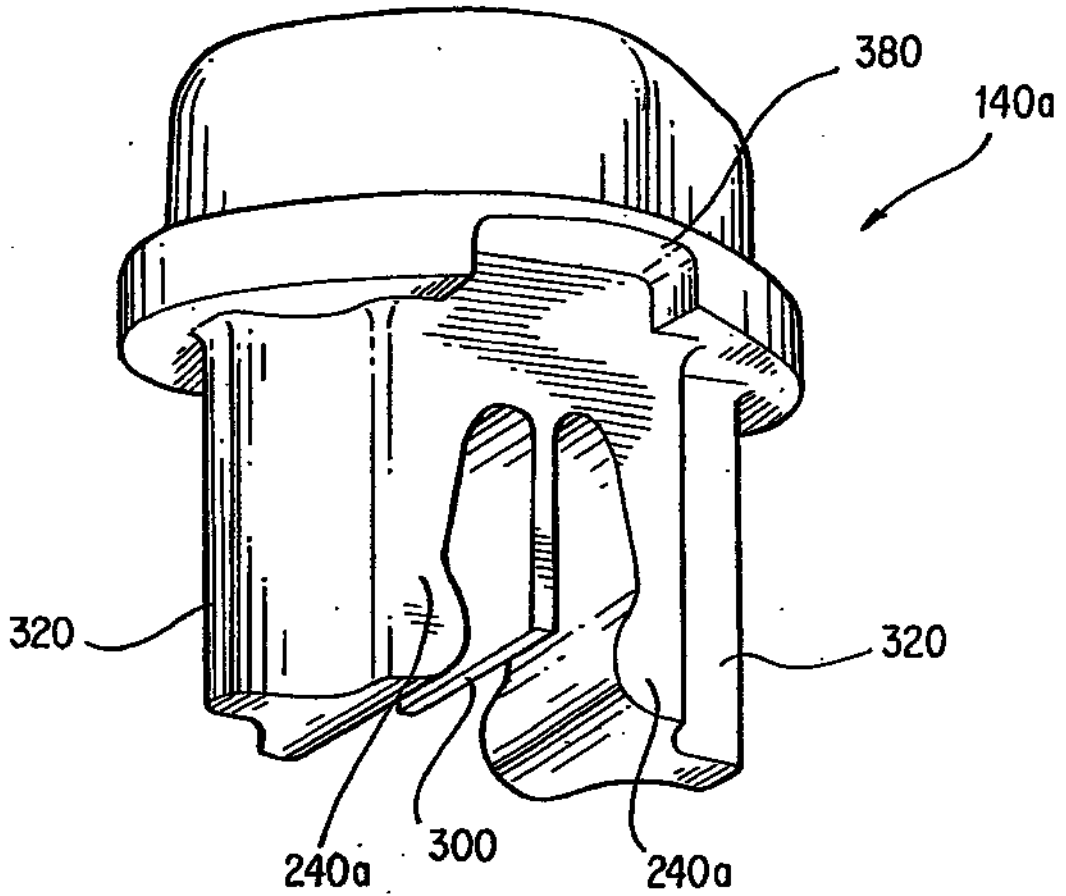


FIG. 5

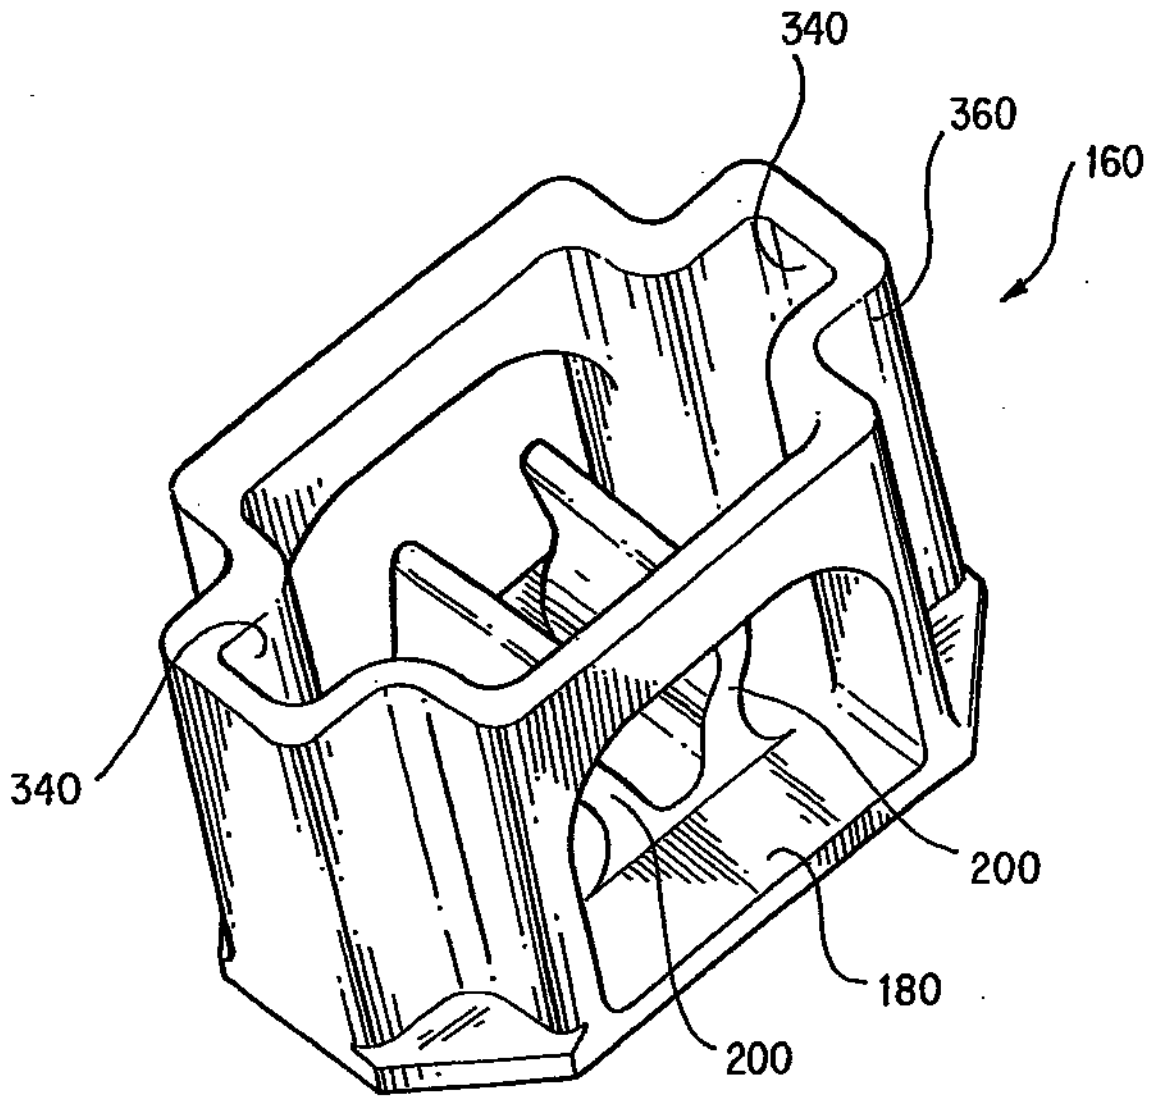


FIG. 6

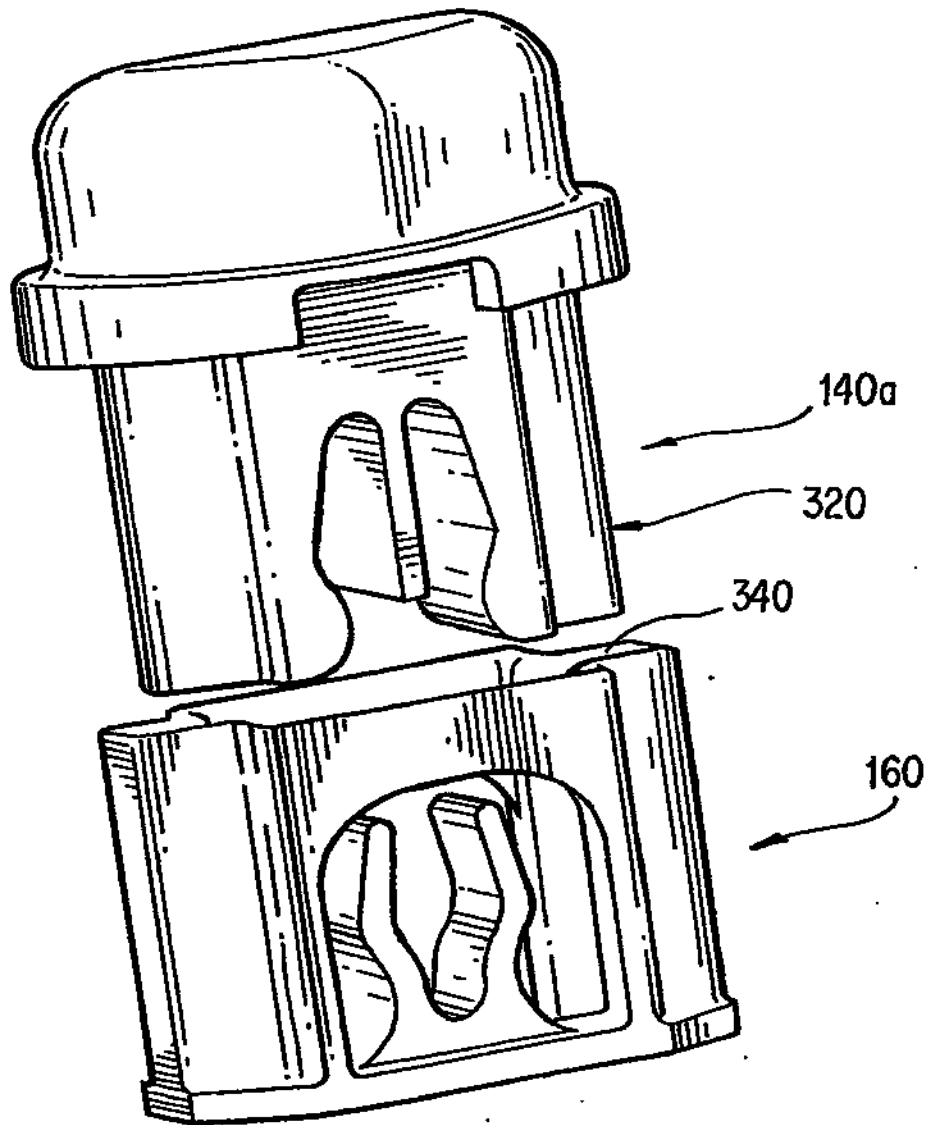


FIG. 7

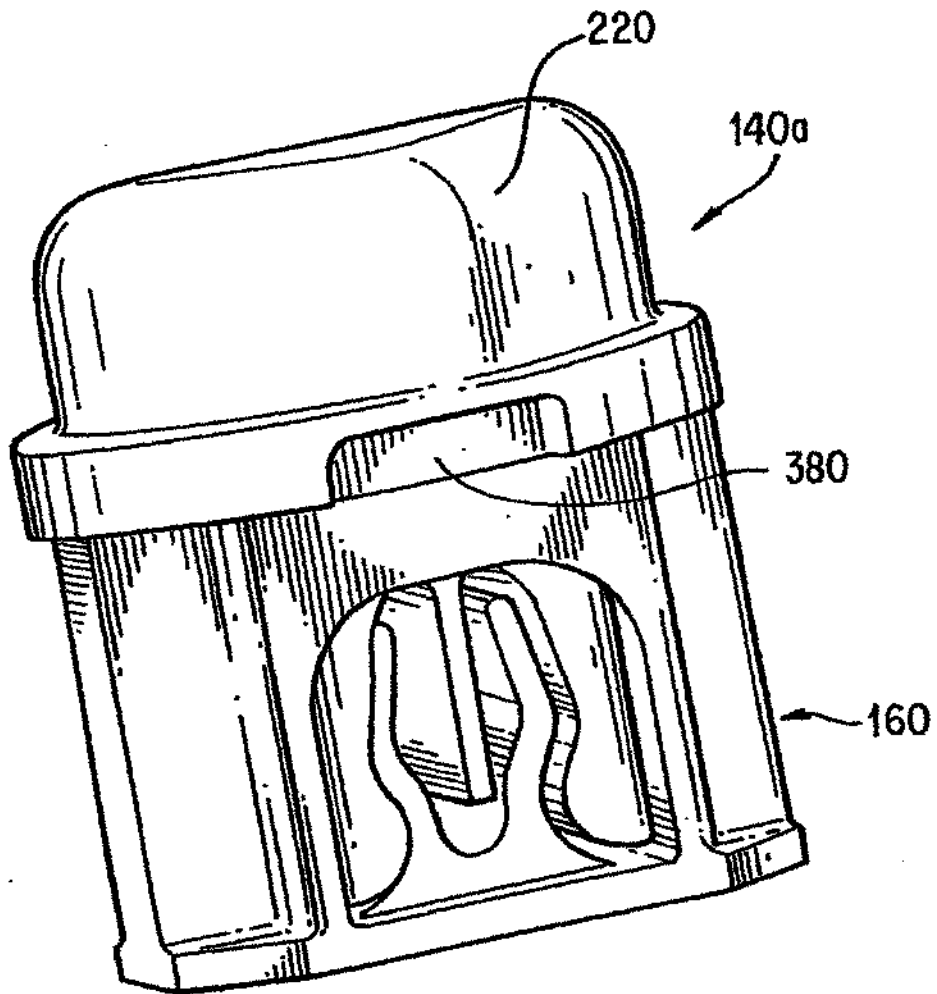


FIG. 8